

Certificate HK07/01191.00

SGS

The management system of

**ELITEGROUP COMPUTER  
SYSTEMS CO., LTD.  
ECS MANUFACTURING  
(SHENZHEN) CO., LTD.**

2F, No.240, Sec.1, Nei Hu Road, Taipei, Taiwan 114, R.O.C  
No.20 & No.26 (Except 1F, 2F&3F) Free Trade Zone, Shatoujiao,  
Shenzhen City, Guangdong Province, China  
has been assessed and certified as meeting the requirements of



**ISO 9001:2000**

For the following activities

Design and Sales of Mainboards, Personal Computers,  
Notebooks, and Peripheral Cards;  
Design and Manufacturing of Mainboards and Peripheral Cards.  
Further certifications regarding the scope of this certificate and the applicability of  
ISO 9001:2000 requirements may be obtained by consulting the organization  
This certificate is valid from 16 March 2007 until 15 March 2010  
Issue 1. Certified with SGS since March 2007

Multiple certificates have been issued for this scope  
The main certificate is numbered HK07/01191.00

Authorised by

*P. Earl*



SGS United Kingdom Ltd. Systems & Services Certification  
Roxsmore Business Park, Eresmore Park, Cheshire, CH65 3EN, UK  
t +44 (0)151 350-6666 f +44 (0)151 350-6600 www.sgs.com

Page 1 of 1



printed on 100% recycled paper, printed by SGS, printed by SGS, printed by SGS



Certificate No.  
PRC-HSPM-1172

Issued:  
Revision:  
Expiration:

July 10, 2007  
N/A  
July 09, 2010

**IECQ Certificate of Hazardous Substance Process Management (HSPM)  
applicable to the European Directive 2002/95/EC ("RoHS") requirements.**

The Supervising Inspectorate (SGS-CSTC Standards Technical Services Co., Ltd.), sponsored by the United States National Authorized Institution, ECCB certify that

**ECS Manufacturing (Shenzhen) Co., Ltd.**

No. 20 & 26 (except 1F, 2F & 3F),  
Free Trade Zone, Shatoujiao,  
Shenzhen, Guangdong Province, P.R. China

Has developed and implemented Hazardous Substances Process Management, procedures, and related processes in compliance with the applicable requirements for HSPM organization approval which is in accordance with the Basic Rules IECQ-01 and Rules of Procedure QC 001002-3 "IECQ Hazardous Substance Process Management" of the IEC Quality Assessment System for Electronic Components (IECQ), and with respect to the Specification QC 080000 IECQ HSPM.

**This certification is applicable to all electronic components and related  
materials and processes for the**

Design and manufacture of Mainboards and Peripheral Cards.

**Issued by Certification Authorities:**



Electronic Component Certification Board

Signed:

Stanley H. Salot Jr. - President, ECCB  
ECCB  
PO Box 9041  
Midland, Texas 79708  
Tel: (432) 697-9970 Fax: (866) 260-6181  
Web Site: [www.eccb.org](http://www.eccb.org)



SGS-CSTC Standards Technical Services Co., Ltd  
16F Century Yuhui Mansion  
73 Fucheng Road  
Beijing, China  
Web Site: [www.sgs.com](http://www.sgs.com)

The validity of this certificate is maintained through on-going surveillance inspections.

Note: This certificate is valid only in conjunction with the approval document(s). This approval and this certificate may be suspended or withdrawn in accordance with the Rules of Procedure of the IECQ. This certificate remains the property of the body which granted it.

## Preface

### Copyright

This publication, including all photographs, illustrations and software, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author.

Version 1.0

### Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

### Trademark Recognition

Microsoft, MS-DOS and Windows are registered trademarks of Microsoft Corp.

MMX, Pentium, Pentium-II, Pentium-III, Celeron are registered trademarks of Intel Corporation.

Other product names used in this manual are the properties of their respective owners and are acknowledged.

### Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment onto an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Shielded interconnect cables and a shielded AC power cable must be employed with this equipment to ensure compliance with the pertinent RF emission limits governing this device. Changes or modifications not expressly approved by the system's manufacturer could void the user's authority to operate the equipment.

## Preface

## Declaration of Conformity

This device complies with part 15 of the FCC rules. Operation is subject to the following conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation

## Canadian Department of Communications

This class B digital apparatus meets all requirements of the Canadian Interference-causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

## About the Manual

The manual consists of the following:

<b>Chapter 1</b> <b>Introducing the Motherboard</b>	Describes features of the motherboard.  Go to ➞ page 1
<b>Chapter 2</b> <b>Installing the Motherboard</b>	Describes installation of motherboard components.  Go to ➞ page 7
<b>Chapter 3</b> <b>Using BIOS</b>	Provides information on using the BIOS Setup Utility.  Go to ➞ page 23
<b>Chapter 4</b> <b>Using the Motherboard Software</b>	Describes the motherboard software  Go to ➞ page 37

## **TABLE OF CONTENTS**

---

<b>Preface</b>	<b>i</b>
<b>Chapter 1</b>	<b>1</b>
<b>Introducing the Motherboard</b>	<b>1</b>
Introduction.....	1
Feature.....	2
Motherboard Components.....	4
<b>Chapter 2</b>	<b>7</b>
<b>Installing the Motherboard</b>	<b>7</b>
Safety Precautions.....	7
Choosing a Computer Case.....	7
Installing the Motherboard in a Case.....	7
Checking Jumper Settings.....	8
<i>Setting Jumpers</i> .....	8
<i>Checking Jumper Settings</i> .....	9
<i>Jumper Settings</i> .....	9
Connecting Case Components.....	10
<i>Front Panel Header</i> .....	12
<i>Installing Memory Modules</i> .....	13
<i>Installing a Hard Disk Drive/CD-ROM/SATA Hard Drive</i> ...16	
<i>Installing Add-on Cards</i> .....	18
<i>Connecting Optional Devices</i> .....	20
Connecting I/O Devices.....	22
<b>Chapter 3</b>	<b>23</b>
<b>Using BIOS</b>	<b>23</b>
About the Setup Utility.....	23
<i>The Standard Configuration</i> .....	23
<i>Entering the Setup Utility</i> .....	23
<i>Updating the BIOS</i> .....	25
Using BIOS.....	25
<i>Standard CMOS Setup</i> .....	26
<i>Advanced Setup</i> .....	28
<i>Advanced Chipset Setup</i> .....	29

<i>Integrated Peripherals</i> .....	30
<i>Power Management Setup</i> .....	31
<i>PCI/PnP Setup</i> .....	32
<i>PC Health Status</i> .....	33
<i>Frequency/Voltage Control</i> .....	34
<i>Load Default Settings</i> .....	35
<i>Supervisor Password</i> .....	35
<i>User Password</i> .....	36
<i>Save &amp; Exit Setup</i> .....	36
<i>Exit Without Saving</i> .....	36

<b>Chapter 4</b>	<b>37</b>
<b>Using the Motherboard Software</b>	<b>37</b>
About the Software CD-ROM.....	37
Auto-installing under Windows 2000/XP/Vista.....	37
<i>Running Setup</i> .....	38
Manual Installation.....	42
Utility Software Reference.....	42

## Chapter 1

### *Introducing the Motherboard*

---

#### **Introduction**

Thank you for choosing 945GCT-D motherboard of great performance and with enhanced function. This motherboard has onboard Intel Diamondville CPU with a Micro DTX form factor of 200 x 170 mm.

The motherboard incorporates the 945GC Northbridge (NB) and ICH7 Southbridge (SB) chipsets. The Northbridge supports a Front Side Bus (FSB) frequency of 533 MHz using a scalable FSB Vcc\_CPU. The memory controller supports DDR2 memory DIMM frequencies of 533/400. It supports two DDR2 Sockets with up to maximum memory of 2 GB.

The ICH7 Southbridge supports one PCI slot which is PCI 2.3 compliant. In addition, one PCI Express x1 slot is supported. It implements an EHCI compliant interface that provides 480 Mb/s bandwidth for 8 USB 2.0 ports (4 USB ports and 2 USB 2.0 headers support additional 4 USB ports). The Southbridge integrates a Serial ATA host controller, supporting two SATA ports with maximum transfer rate up to 3.0 Gb/s each.

The motherboard is equipped with advanced full set of I/O ports in the rear panel, including PS/2 mouse and keyboard connectors, one serial port, one VGA port, four USB ports, one LAN port and audio jacks for microphone, line-in and line-out.

## Feature

### Processor

This motherboard uses onboard Intel Diamondville CPU that carries the following features:

- Onboard Intel Atom (Diamondville) single core, 1.60GHz CPU speed with 512KB cache
- Supports a system bus (FSB) of 533 MHz
- Supports “Hyper-Threading” technology CPU

“Hyper-Threading” technology enables the operating system into thinking it’s hooked up to two processors, allowing two threads to be run in parallel, both on separate “logical” processors within the same physical processor.

### Chipset

The 945GC Northbridge (NB) and ICH7 Southbridge (SB) chipsets are based on an innovative and scalable architecture with proven reliability and performance.

- |                   |   |
|-------------------|---|
| <b>945GC (NB)</b> | <ul style="list-style-type: none"> <li>• Supports 32-bit host bus addressing</li> <li>• 2 GB/s point-to-point Direct Media Interface (DMI) to ICH7 (1 Gb/s each direction)</li> <li>• Supports 256-Mb, 512-Mb and 1-Gb DDR2 technologies for x8 and x16 devices</li> <li>• Supports high quality 3D setup, Render Engine and high-quality texture engine</li> </ul>   |
| <b>ICH7 (SB)</b>  | <ul style="list-style-type: none"> <li>• Enhanced DMA Controller, interrupt controller, and timer functions</li> <li>• Compliant with PCI Express Base Specification, Revision 1.0a</li> <li>• Compliant with PCI 2.3 specification</li> <li>• Integrated SATA 3.0 Gb/s Host Controller</li> <li>• Integrated USB 2.0 Host Controller supporting up to eight USB 2.0 ports</li> <li>• Integrated IDE controller supports Ultra ATA 100/66/33</li> </ul> |

### Memory

- Supports DDR2 533/400 DDR2 SDRAM
- Accommodates two unbuffered DIMMs
- Up to 1 GB per DIMM with maximum memory size up to 2 GB

### Audio

The onboard Audio provides the following features:

- 5.1 Channel High Definition Audio Codec
- Exceeds Microsoft Windows Logo Program (WLP) Requirements
- ADCs support 44.1K/48K/96K/192KHz sample rate
- Power Support: Digital: 3.3V; Analog: 5.0V

## Introducing the Motherboard



## Onboard LAN

The onboard LAN controller provides the following features:

- Integrated 10BASE-T/100BASE-TX Transceiver
- Integrated IEEE802.3z compliant
- IEEE 802.3u Auto-Negotiation

## Expansion Options

The motherboard comes with the following expansion options:

- One PCI Express x1 slot
- One 32-bit PCI v2.3 compliant slot
- One IDE connector that supports two IDE devices
- Two 7-pin SATA connectors

The motherboard supports UDMA bus mastering with transfer rates of 100/66/33 Mb/s.

## Integrated I/O

The motherboard has a full set of I/O ports and connectors:

- Two PS/2 ports for mouse and keyboard
- One serial port
- One VGA port
- Four USB ports
- One LAN port
- Audio jacks for microphone, line-in and line-out

## BIOS Firmware

This motherboard uses AMI BIOS that enables users to configure many system features including the following:

- Power management
- Wake-up alarms
- CPU parameters
- CPU and memory timing


The firmware can also be used to set parameters for different processor clock speeds.



1. Some hardware specifications and software items are subject to change without prior notice.
2. Due to chipset limitation, we recommend that motherboard be operated in the ambience between 0 and 50 °C.
3. To achieve better performance and air flow, we suggest that you use a system fan on this motherboard.

## Introducing the Motherboard

## Motherboard Components

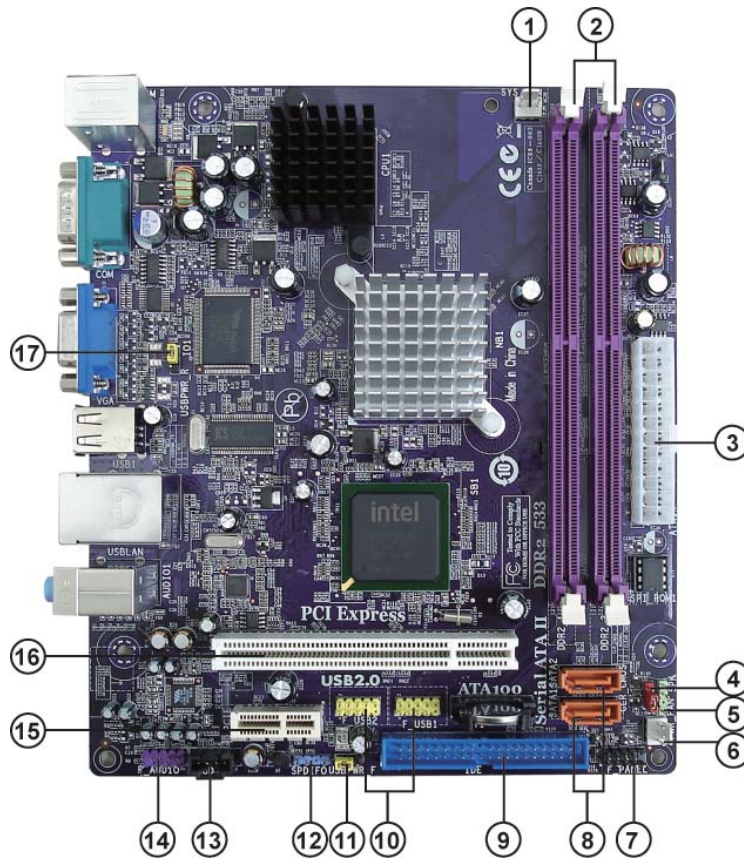

Introducing the Motherboard

*Table of Motherboard Components*

LABEL	COMPONENTS
1. SYS_FAN	System cooling fan connector
2. DDR2_1~2	240-pin DDR2 SDRAM slots
3. ATX1	Standard 24-pin ATX power connector
4. CLR_CMOS	Clear CMOS jumper
5. SPK	Internal speaker header
6. PWR_FAN	Power cooling fan connector
7. F_PANEL	Front panel switch/LED header
8. SATA1~2	Serial ATA connectors
9. IDE	Primary IDE connector
10. F_USB1~2	Front Panel USB headers
11. USBPWR_F	Front Panel USB Power Select jumper
12. SPDIFO	SPDIF out header
13. CD_IN	Analog audio input connector
14. F_AUDIO	Front panel audio header
15. PCIE	PCI Express x1 slot
16. PCI	32-bit add-on card slot
17. USBPWR_R	Rear USB/PS2 Power Select jumper

This concludes Chapter 1. The next chapter explains how to install the motherboard.

## *Memo*

Introducing the Motherboard

## Chapter 2

### *Installing the Motherboard*

---

#### **Safety Precautions**

- Follow these safety precautions when installing the motherboard
- Wear a grounding strap attached to a grounded device to avoid damage from static electricity
- Discharge static electricity by touching the metal case of a safely grounded object before working on the motherboard
- Leave components in the static-proof bags they came in
- Hold all circuit boards by the edges. Do not bend circuit boards

#### **Choosing a Computer Case**

There are many types of computer cases on the market. The motherboard complies with the specifications for the Micro DTX system case. First, some features on the motherboard are implemented by cabling connectors on the motherboard to indicators and switches on the system case. Make sure that your case supports all the features required. Secondly, this motherboard supports two enhanced IDE drives. Make sure that your case has sufficient power and space for all drives that you intend to install.

Most cases have a choice of I/O templates in the rear panel. Make sure that the I/O template in the case matches the I/O ports installed on the rear edge of the motherboard.


This motherboard carries a Micro DTX form factor of 200 x 170 mm. Choose a case that accommodates this form factor.

#### **Installing the Motherboard in a Case**

Refer to the following illustration and instructions for installing the motherboard in a case.

Most system cases have mounting brackets installed in the case, which correspond the holes in the motherboard. Place the motherboard over the mounting brackets and secure the motherboard onto the mounting brackets with screws.

Ensure that your case has an I/O template that supports the I/O ports and expansion slots on your motherboard.

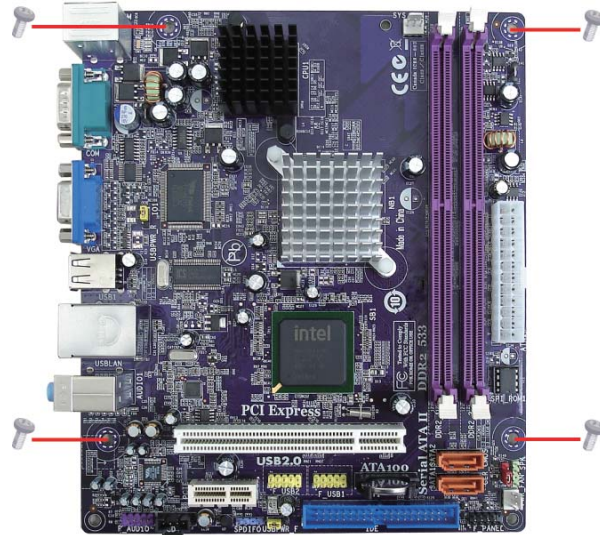

*Do not over-tighten the screws as this can stress the motherboard.*

## Checking Jumper Settings

This section explains how to set jumpers for correct configuration of the motherboard.

### Setting Jumpers

Use the motherboard jumpers to set system configuration options. Jumpers with more than one pin are numbered. When setting the jumpers, ensure that the jumper caps are placed on the correct pins.

The illustrations show a 2-pin jumper. When the jumper cap is placed on both pins, the jumper is **SHORT**. If you remove the jumper cap, or place the jumper cap on just one pin, the jumper is **OPEN**.




**SHORT**



**OPEN**


This illustration shows a 3-pin jumper. Pins 1 and 2 are **SHORT**.






## Installing the Motherboard

### Checking Jumper Settings

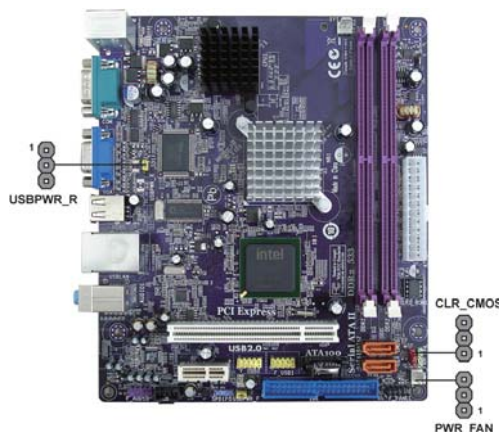The following illustration shows the location of the motherboard jumpers. Pin 1 is labeled.



### Jumper Settings

Jumper	Type	Description	Setting (default)	
CLR_CMOS	3-pin	CLEAR CMOS	1-2: NORMAL 2-3: CLEAR CMOS Before clearing the CMOS, make sure to turn the system off.	 CLR_CMOS
USBPWR_F	3-pin	Front Panel USB Power Select Jumper	1-2: VCC5 2-3: VCC5_DUAL	 USBPWR_F
USBPWR_R	3-pin	Rear USB/PS2 Power Select Jumper	1-2: VCC5 2-3: VCC5_DUAL	 USBPWR_R




1. To avoid the system instability after clearing CMOS, we recommend users to enter the main BIOS setting page to "Load Optimized Defaults" and then "Save & Exit Setup".
2. Make sure the power supply provides enough VCC5\_DUAL voltage before selecting the VCC5\_DUAL function.
3. It is required that users place the USBPWR\_F & USBPWR\_R cap onto 2-3 pin rather than 1-2 pin as default if you want to wake up the computer by USB/PS2 KB/Mouse.

### Installing the Motherboard

## Connecting Case Components


After you have installed the motherboard into a case, you can begin connecting the motherboard components. Refer to the following:

- 1 Connect the system cooling fan connector to **SYS\_FAN**.
- 2 Connect the power cooling fan connector to **PWR\_FAN**.
- 3 Connect the case switches and indicator LEDs to the **F\_PANEL**.
- 4 Connect the standard power supply connector to **ATX1**.
- 5 Connect the case speaker cable to **SPK**.

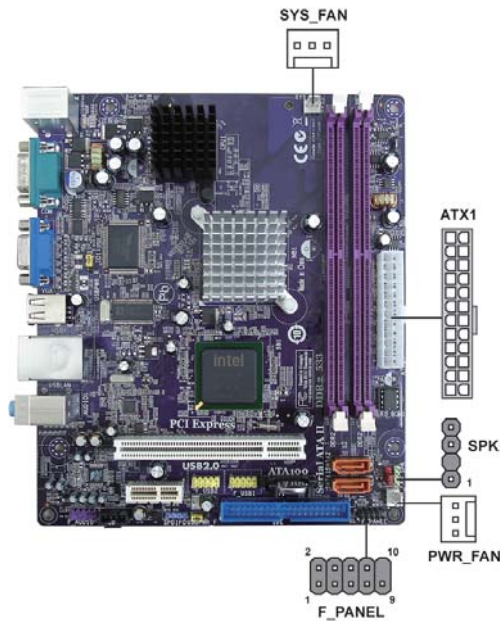

### Connecting 24-pin power cable

Users please note that the 24-pin power cable can be connected to the ATX1 connector.



*24-pin power cable*

With ATX v2.x power supply, users please note that when installing 24-pin power cable, the latches of power cable and the ATX1 match perfectly.

Installing the Motherboard



**SYS\_FAN/PWR\_FAN: FAN Power Connectors**

Pin	Signal Name	Function
1	GND	System Ground
2	+12V	Power +12V
3	Sense	Sensor

**ATX1: ATX 24-pin Power Connector**


Pin	Signal Name	Pin	Signal Name
1	+3.3V	13	+3.3V
2	+3.3V	14	-12V
3	Ground	15	Ground
4	+5V	16	PS_ON
5	Ground	17	Ground
6	+5V	18	Ground
7	Ground	19	Ground
8	PWRGD	20	-5V
9	+5VSB	21	+5V
10	+12V	22	+5V
11	+12V	23	+5V
12	+3.3V	24	Ground

**SPK: Internal speaker header**

Pin	Signal Name
1	VCC
2	Key
3	GND
4	Signal

**Front Panel Header**

The front panel header (F\_PANEL) provides a standard set of switch and LED headers commonly found on ATX or Micro ATX cases. Refer to the table below for information:



Pin	Signal	Function	Pin	Signal	Function
1	HD_LED_P	Hard disk LED(+)	2	FP PWR/SLP	*MSG LED(+)
3	HD_LED_N	Hard disk LED(-)	4	FP PWR/SLP	*MSG LED(-)
5	RST_SW_N	Reset Switch(-)	6	PWR_SW_P	Power Switch(+)
7	RST_SW_P	Reset Switch(+)	8	PWR_SW_N	Power Switch(-)
9	RSVD	Reserved	10	Key	No pin

\* MSG LED (dual color or single color)

**Hard Drive Activity LED**

Connecting pins 1 and 3 to a front panel mounted LED provides visual indication that data is being read from or written to the hard drive. For the LED to function properly, an IDE drive should be connected to the onboard IDE interface. The LED will also show activity for devices connected to the SCSI (hard drive activity LED) connector.

**Power/Sleep/Message waiting LED**

Connecting pins 2 and 4 to a single or dual-color, front panel mounted LED provides power on/off, sleep, and message waiting indication.

**Reset Switch**

Supporting the reset function requires connecting pin 5 and 7 to a momentary-contact switch that is normally open. When the switch is closed, the board resets and runs POST.

**Power Switch**

Supporting the power on/off function requires connecting pins 6 and 8 to a momentary-contact switch that is normally open. The switch should maintain contact for at least 50 ms to signal the power supply to switch on or off. The time requirement is due to internal de-bounce circuitry. After receiving a power on/off signal, at least two seconds elapses before the power supply recognizes another on/off signal.

### Installing Memory Modules

This motherboard accommodates two memory modules. It can support two 240-pin DDR2 533/400. The total memory capacity is 2 GB.

#### DDR2 SDRAM memory module table

Memory module	Memory Bus
<b>DDR2 400</b>	<b>200 MHz</b>
<b>DDR2 533</b>	<b>266 MHz</b>

You must install at least one module in any of the two slots. Each module can be installed with 1 GB of memory; total memory capacity is 2 GB.



*Do not remove any memory module from its antistatic packaging until you are ready to install it on the motherboard. Handle the modules only by their edges. Do not touch the components or metal parts. Always wear a grounding strap when you handle the modules.*

### Installation Procedure

Refer to the following to install the memory modules.

- 1 This motherboard supports unbuffered DDR2 SDRAM .
- 2 Push the latches on each side of the DIMM slot down.
- 3 Align the memory module with the slot. The DIMM slots are keyed with notches and the DIMMs are keyed with cutouts so that they can only be installed correctly.
- 4 Check that the cutouts on the DIMM module edge connector match the notches in the DIMM slot.
- 5 Install the DIMM module into the slot and press it firmly down until it seats correctly. The slot latches are levered upwards and latch on to the edges of the DIMM.
- 6 Install any remaining DIMM modules.



Installing the Motherboard

**Table A: DDR2 (memory module) QVL (Qualified Vendor List)**

The following DDR2 533/400 memory modules have been tested and qualified for use with this motherboard.

Type	Size	Vendor	Module Name
DDR2 400	256 MB	Samsung	M378T3354BZ0-CCC K4T51163QB-ZCCC
	512 MB	Samsung	M378T6553BG0-CCC K4T51083QB-GCCC
		TwinMos	Samsung K4T51083QB-GCCC
DDR2 533	256 MB	Corsair	VC256MB533D2 4PB11D9CHM
		Elpida	Japan E2508AA-T7F-E
		Kingmax	Hynix HY5PS121621
		Nanya	Nanya NT5TU32M16AG-37B
		Ramaxel	Elpida D5116AF-5C-E
		Ramaxel	5PB42 D9DCD
		Aeneon	Aeneon AET94F370 DS
	512 MB	Aeneon	Aeneon AET93F370 SS
		Corsair	Samsung K4T51083QB-ZCD5
		Corsair	VS512MB533D2 64M8CEC
		Elpida	Elpida 04180WB01
		Hynix	Hynix HY5PS12821
		Infineon	HY818T512800AF37 33346778
		Kingston	Hynix HY5PS12821
		Kingston	Nanya NT5TU64M8AE-37B
		Ramaxel	5PB32 D9DCN
		Ramaxel	Elpida E5108AG-5C-E
		Ramaxel	6AD11 D9GCT
		Samsung	PC2-4200U-4444-10-B1 K4T56083QF-ZCD5
		Samsung	PC2-4200U-4444-12-DS K4T51083QC
		Twinmos	Samsung 8D22JB-KM
		Twinmos	Elpida E5108AB-5C-E
		Apacer	Elpida E5108AB-5C-E
	1 GB	Geil	A016E2864T2AG8AKT5H120001
		Infineon	HY818T512800AF37 33344539
		Kingmax	KKEA88E4AAKG-37
		UMAX	U2S12D30TP-5C

Type	Size	Vendor	Module Name
DDR2 667	512 MB	Apacer	78.91G92.9K5
		Micron	MT4HTF6464AY-667E1
		PSC	AL6E8E63J-6E1
		Ramxcel	RML1520M38D6F-667
		Samsung	PC2-5300U-555-12-D3
	1 GB	AU01GE667C5KBGC	
		Apacer	78.01G90.9K5
		Corsair	VS1GB667D2
		Hexon	HYNT7AUDR-30M48
		Kingston	KVR667D2N5
		Micron	MT8HTF12864AY-667E1
		PSC	AL7E8E63B-6E1T
			AL7E8F63J-6E1
			AL7E8F73C-6E1
		Samsung	GOLD BAR M378T2863DZS 0742
	2 GB	Aeneon	AET860UD00-30DB08X
		Apacer	78.A1G90.9K4
		Hynix	HYMP125U64AP8-Y5 AB-A 0623
		Hexon	HYNT8AUDR-30M88
		Kingston	KVR667D2N5/2G
		LeadMax	PC2-5300U
		PSC	AL8E8F73C-6E1
		Qimonda	HYS64T256020EU-3S-C2
DDR2 800	512 MB	Kingston	KVR800D2N5/512 1.8V 9905315-019.A02LF
		Micron	MT8HTF6464AY-80ED4
		Qimonda	HYS72T64000HU-2.5-B
	1 GB	A-DATA	M2GVD6G3I41P0U1E5E
		Aeneon	AET760UD00-30DB97X
			AET760UD00-25DC08X
		Apacer	AU01GE800C5KBGC
			78.01GAO.9K5
			78.01GAO.9L5
		APOGEE	AU1G082-800P000/1GB
		Geil	GEIL MILLENARY
		Hexon	ELPT7AUDR-25M48
		Infinity	04701G16C25U2G/1GB
		Kingston	KVR800D2N5/1G 1.8V 9905316-054.A01LF
		KingMax	KLDD48F-B8KU5 NGES
		Nanya	NT1GT64U88D0BY-AD
		PSC	AL7E8F73C-8E1/1GB
		Ramaxel	RML1320EH38D7F-800
		Samsung	GOLD BAR M378T2953EZ3-CE7 0726
			M378T2863EHS-CF7 0849
		Silicon Power	SP001GBLRU800S01
		Transcend	507301-1571
		Unifosa	GU341G0ALEPR6B2C6CE
	2 GB	A-DATA	RED A-DATAM2OMI6H3J4720L1C5Z
		Aeneon	AET860UD00-25DC08X
		Apacer	78.A1GAO.9K4
		CORSAIR	CM2X2048-6400C5
		Geil	GEIL PLATINUM EDITION
		Hexon	ELPT8AUDR-25M88
		Kingston	KVR800D2N5/2G
			KVR800D2N6/2G-SP
		KingMax	KLDE88F-B8KU5 NHES
			78.A1GC0.9L4
		Micron	MT16HTF25664AY-800E1
		Nanya	NT2GT64U8HD0BY-AD
		PSC	AL8E8F73C-8E1
		Qimonda	HYS64T256020EU-25F-C2
		Samsung	M378T5663QZ3-CF7
		Silicon Power	SP002GBLRU800S01
		Samsung	M378T5663EH3-CF7 0849
		Unifosa	GU342G0ALEPR692C6CE



User please be noted that DDR2 800/667 MHz is validated to run at 533 MHz only.

## Installing the Motherboard

### ***Installing a Hard Disk Drive/CD-ROM/SATA Hard Drive***

This section describes how to install IDE devices such as a hard disk drive and a CD-ROM drive.

#### **About IDE Devices**

Your motherboard has one IDE channel interface. An IDE ribbon cable supporting two IDE devices is bundled with the motherboard.



*You must orient the cable connector so that the pin1 (color) edge of the cable corresponds to the pin 1 of the I/O port connector.*

#### **IDE: IDE Connector**

This motherboard supports two high data transfer SATA ports with each runs up to 3.0 Gb/s. To get better system performance, we recommend users connect the CD-ROM to the IDE channel, and set up the hard drives on the SATA ports.



IDE devices enclose jumpers or switches used to set the IDE device as MASTER or SLAVE. Refer to the IDE device user's manual. Installing two IDE devices on one cable, ensure that one device is set to MASTER and the other device is set to SLAVE. The documentation of your IDE device explains how to do this.

#### **About SATA Connectors**

Your motherboard features two SATA connectors supporting a total of two drives. SATA refers to Serial ATA (Advanced Technology Attachment) is the standard interface for the IDE hard drives which are currently used in most PCs. These connectors are well designed and will only fit in one orientation. Locate the SATA connectors on the motherboard and follow the illustration below to install the SATA hard drives.

#### **Installing Serial ATA Hard Drives**

To install the Serial ATA (SATA) hard drives, use the SATA cable that supports the Serial ATA protocol. This SATA cable comes with an SATA power cable. You can connect either end of the SATA cable to the SATA hard drive or the connector on the motherboard.



**SATA cable (optional)**



**SATA power cable (optional)**

Installing the Motherboard

Refer to the illustration below for proper installation:


- 1 Attach either cable end to the connector on the motherboard.
- 2 Attach the other cable end to the SATA hard drive.
- 3 Attach the SATA power cable to the SATA hard drive and connect the other end to the power supply.



*This motherboard supports the “Hot-Plug” function.*

### *Installing Add-on Cards*

The slots on this motherboard are designed to hold expansion cards and connect them to the system bus. Expansion slots are a means of adding or enhancing the motherboard's features and capabilities. With these efficient facilities, you can increase the motherboard's capabilities by adding hardware that performs tasks that are not part of the basic system.

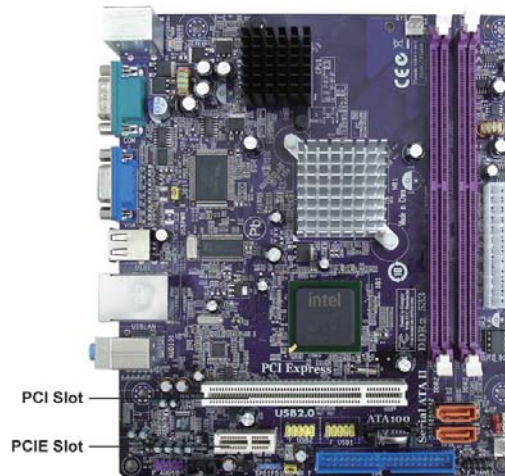

**PCIe Slot** The PCI Express x1 slot is fully compliant to the PCI Express Base Specification revision 1.0a.

**PCI Slot** This motherboard is equipped with one standard PCI slot. PCI stands for Peripheral Component Interconnect and is a bus standard for expansion cards, which for the most part, is a supplement of the older ISA bus standard. The PCI slot on this board is PCI v2.3 compliant.




*Before installing an add-on card, check the documentation for the card carefully. If the card is not Plug and Play, you may have to manually configure the card before installation.*

## Installing the Motherboard



Follow these instructions to install an add-on card:

- 1 Remove a blanking plate from the system case corresponding to the slot you are going to use.
- 2 Install the edge connector of the add-on card into the expansion slot. Ensure that the edge connector is correctly seated in the slot.
- 3 Secure the metal bracket of the card to the system case with a screw.

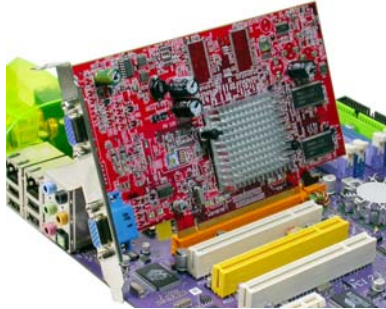


1. *For some add-on cards, for example graphics adapters and network adapters, you have to install drivers and software before you can begin using the add-on card.*
2. *The onboard PCI interface does not support 64-bit SCSI cards.*

## Installing the Motherboard

Connecting Optional Devices

Refer to the following for information on connecting the motherboard's optional devices:

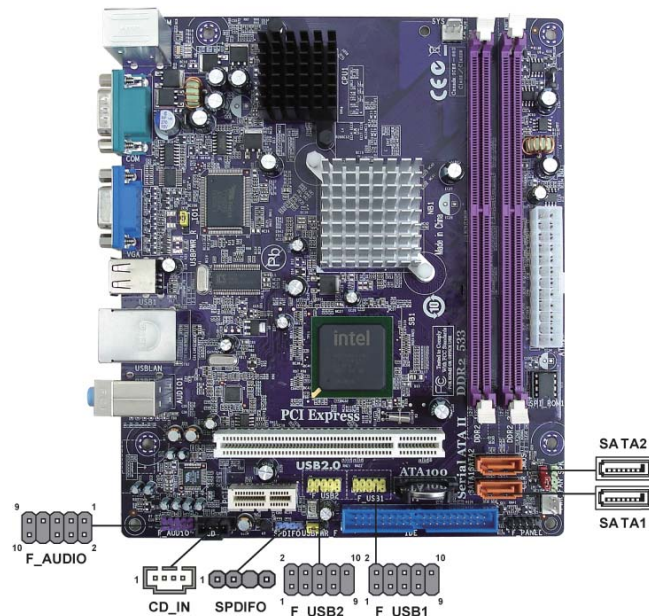

F\_AUDIO: Front Panel Audio header

This header allows the user to install auxiliary front-oriented microphone and line-out ports for easier access.

Pin	Signal Name	Pin	Signal Name
1	PORT 1L	2	AUD_GND
3	PORT 1R	4	PRESENCE#
5	PORT 2R	6	SENSE1_RETURN
7	SENSE_SEND	8	KEY
9	PORT 2L	10	SENSE2_RETURN

CD\_IN: Analog Audio Input connector

Pin	Signal Name	Function
1	CD_L	CD In left channel
2	GND	Ground
3	GND	Ground
4	CD_R	CD In right channel

### SATA1~2: Serial ATA connectors

These connectors are used to support the new Serial ATA devices for the highest data transfer rates (3.0 Gb/s), simpler disk drive cabling and easier PC assembly. It eliminates limitations of the current Parallel ATA interface. But maintains register compatibility and software compatibility with Parallel ATA.

Pin	Signal Name	Pin	Signal Name
1	Ground	2	TX+
3	TX-	4	Ground
5	RX-	6	RX+
7	Ground	-	-

### F\_USB1~2: Front Panel USB headers

The motherboard has four USB ports installed on the rear edge I/O port array. Additionally, some computer cases have USB ports at the front of the case. If you have this kind of case, use auxiliary USB connector to connect the front-mounted ports to the motherboard.

Pin	Signal Name	Function
1	USBPWR	Front Panel USB Power
2	USBPWR	Front Panel USB Power
3	USB_FP_P0-	USB Port 0 Negative Signal
4	USB_FP_P1-	USB Port 1 Negative Signal
5	USB_FP_P0+	USB Port 0 Positive Signal
6	USB_FP_P1+	USB Port 1 Positive Signal
7	GND	Ground
8	GND	Ground
9	Key	No pin
10	USB_FP_OC0	Overcurrent signal



Please make sure that the USB cable has the same pin assignment as indicated above. A different pin assignment may cause damage or system hang-up.


### SPDIFO: SPDIF out header

This is an optional header that provides an SPDIFO (Sony/Philips Digital Interface) output to digital multimedia device through optical fiber or coaxial connector.

Pin	Signal Name
1	SPDIFOUT
2	+5V
3	Key
4	GND

## Connecting I/O Devices

The backplane of the motherboard has the following I/O ports:

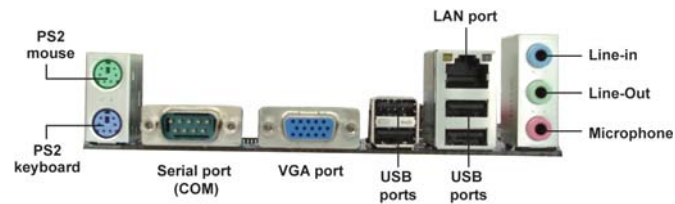

<b>PS2 Mouse</b>	Use the upper PS/2 port to connect a PS/2 pointing device.
<b>PS2 Keyboard</b>	Use the lower PS/2 port to connect a PS/2 keyboard.
<b>Serial Port (COM)</b>	Use the COM port to connect serial devices such as mice or fax/modems.
<b>VGA Port</b>	Connect your monitor to the VGA port.
<b>LAN Port</b>	Connect an RJ-45 jack to the LAN port to connect your computer to the Network.
<b>USB Ports</b>	Use the USB ports to connect USB devices.
<b>Audio Ports</b>	Use the three audio ports to connect audio devices. The first jack is for stereo line-in signal. The second jack is for stereo line-out signal. The third jack is for microphone.

This concludes Chapter 2. The next chapter covers the BIOS.

## Chapter 3

### *Using BIOS*

---

#### **About the Setup Utility**

The computer uses the latest “American Megatrends Inc.” BIOS with support for Windows Plug and Play. The CMOS chip on the motherboard contains the ROM setup instructions for configuring the motherboard BIOS.

The BIOS (Basic Input and Output System) Setup Utility displays the system’s configuration status and provides you with options to set system parameters. The parameters are stored in battery-backed-up CMOS RAM that saves this information when the power is turned off. When the system is turned back on, the system is configured with the values you stored in CMOS.

The BIOS Setup Utility enables you to configure:

- Hard drives, diskette drives and peripherals
- Video display type and display options
- Password protection from unauthorized use
- Power Management features

The settings made in the Setup Utility affect how the computer performs. Before using the Setup Utility, ensure that you understand the Setup Utility options.

This chapter provides explanations for Setup Utility options.

#### ***The Standard Configuration***

A standard configuration has already been set in the Setup Utility. However, we recommend that you read this chapter in case you need to make any changes in the future.

This Setup Utility should be used:

- when changing the system configuration
- when a configuration error is detected and you are prompted to make changes to the Setup Utility
- when trying to resolve IRQ conflicts
- when making changes to the Power Management configuration
- when changing the password or making other changes to the Security Setup

#### ***Entering the Setup Utility***

When you power on the system, BIOS enters the Power-On Self Test (POST) routines. POST is a series of built-in diagnostics performed by the BIOS. After the POST routines are completed, the following message appears:

Using BIOS

**Press DEL to enter SETUP**

Press the DEL key to access the BIOS Setup Utility.

CMOS Setup Utility -- Copyright (C) 1985-2005, American Megatrends, Inc.

<ul style="list-style-type: none"> <li>▶ Standard CMOS Setup</li> <li>▶ Advanced Setup</li> <li>▶ Advanced Chipset Setup</li> <li>▶ Integrated Peripherals</li> <li>▶ Power Management Setup</li> <li>▶ PCI/PnP Setup</li> <li>▶ PC Health Status</li> </ul>	<ul style="list-style-type: none"> <li>▶ Frequency/Voltage Control</li> <li>Load Default Settings</li> <li>▶ Supervisor Password</li> <li>▶ User Password</li> <li>Save &amp; Exit Setup</li> <li>Exit Without Saving</li> </ul>
<p>↑↓ → ← Move   Enter : Select   +/- : Value   F10: Save   ESC: Exit  F1: General Help   F9: Optimized Defaults</p>	
<p>v02.61 (C) Copyright 1985-2007, American Megatrends, Inc.</p>	

***BIOS Navigation Keys***

The BIOS navigation keys are listed below:

KEY	FUNCTION
<b>ESC</b>	Exits the current menu
↑↓ → ←	Scrolls through the items on a menu
<b>+/-/PU/PD</b>	Modifies the selected field's values
<b>Enter</b>	Select
<b>F9</b>	Loads an optimized setting for better performance
<b>F10</b>	Saves the current configuration and exits setup
<b>F1</b>	Displays a screen that describes all key functions

### ***Updating the BIOS***

You can download and install updated BIOS for this motherboard from the manufacturer's Web site. New BIOS provides support for new peripherals, improvements in performance, or fixes for known bugs. Install new BIOS as follows:

- 1 Create a bootable system disk. (Refer to Windows online help for information on creating a bootable system disk.)
- 2 Download the Flash Utility and new BIOS file from the manufacturer's Web site. Copy these files to the system diskette you created in Step 1.
- 3 Turn off your computer and insert the system diskette in your computer's diskette drive.
- 4 At the X:\ (working disk) prompt, type the Flash Utility program name and the file name of the new bios and then press <Enter>. Example: AMINF340.EXE 040706.ROM
- 5 The computer will restart automatically. If your motherboard has a Flash BIOS jumper, reset the jumper to protect the newly installed BIOS from being overwritten.

### **Using BIOS**

When you start the Setup Utility, the main menu appears. The main menu of the Setup Utility displays a list of the options that are available. A highlight indicates which option is currently selected. Use the cursor arrow keys to move the highlight to other options. When an option is highlighted, execute the option by pressing <Enter>.

Some options lead to pop-up dialog boxes that prompt you to verify that you wish to execute that option. Other options lead to dialog boxes that prompt you for information.

Some options (marked with a triangle ►) lead to submenus that enable you to change the values for the option. Use the cursor arrow keys to scroll through the items in the submenu.

In this manual, default values are enclosed in parenthesis. Submenu items are denoted by a triangle ►.

### Standard CMOS Setup

This option displays basic information about your system.

CMOS Setup Utility -- Copyright (C) 1985-2005, American Megatrends, Inc.  
Standard CMOS Setup

Date	Mon 01/01/2007	Help Item
Time	00 : 03 : 36	
► Primary IDE Master	Not Detected	While entering setup, BIOS auto detects the presence of SATA devices. This displays the status of auto detection of SATA devices.
► Primary IDE Slave	Not Detected	
► SATA1	Not Detected	
► SATA2	Not Detected	
IDE BusMaster	Enabled	

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

### Date & Time

The Date and Time items show the current date and time on the computer. If you are running a Windows OS, these items are automatically updated whenever you make changes to the Windows Date and Time Properties utility.

#### ► Primary IDE Master/Slave; SATA1/2

Your computer has one IDE channel which can be installed with one or two devices (Master and Slave). In addition, this motherboard supports two SATA channels and each channel allows one SATA device to be installed. Use these items to configure each device on the IDE channel.

CMOS SETUP UTILITY -- Copyright (C) 1985-2005, American Megatrends, Inc.  
Secondary IDE Master

Secondary IDE Master		Help Item
Device : Not Detected		
Type	Auto	Select the type of device connected to the system.
LBA/Large Mode	Auto	
Block (Multi-Sector Transfer)	Auto	
PIO Mode	Auto	
DMA Mode	Auto	
S.M.A.R.T	Auto	
32Bit Data Transfer	Enabled	

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

## Using BIOS



**Type (Auto)**

Use this item to configure the type of the IDE device that you specify. If the feature is enabled, it will enhance hard disk performance by reading or writing more data during each transfer

**LBA/Large Mode (Auto)**

Use this item to set the LAB/Large mode to enhance hard disk performance by optimizing the area the hard disk is visited each time.

**Block (Multi-Sector Transfer) (Auto)**

If the feature is enabled, it will enhance hard disk performance by reading or writing more data during each transfer.

**PIO Mode (Auto)**

Use this item to set the PIO mode to enhance hard disk performance by optimizing the hard disk timing.

**DMA Mode (Auto)**

DMA capability allows user to improve the transfer-speed and data-integrity for compatible IDE devices.

**S.M.A.R.T. (Auto)**

The S.M.A.R.T. (Self-Monitoring, Analysis and Reporting Technology) system is a diagnostics technology that monitors and predicts device performance. S.M.A.R.T. software resides on both the disk drive and the host computer.

**32Bit Data Transfer (Enabled)**

Use this item to set the onboard SATA-IDE channel to be disabled, IDE, or RAID.

Press <Esc> to return to the Standard CMOS Setup page.

**IDE BusMaster (Enabled)**

This item enables or disables the DMA under DOS mode. We recommend you to leave this item at the default value.

Press <Esc> to return to the main menu setting page.

### Advanced Setup

This page sets up more advanced information about your system. Handle this page with caution. Any changes can affect the operation of your computer.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Advanced Setup

Thermal Management	Enabled	Help Item
TM Status	TM1/TM2	
Limit CPUID MaxVal	Disabled	For the processor its CPUID belows 0F41h. TM2 only can be enable under below setting.
Intel XD Bit	Enabled	1. Freq.>=3.6GHz FSB800
Hyper-Threading Technology	Enabled	2. Freq.>=2.8GHz FSB 533
Quick Power on Self Test	Enabled	
Boot up Numlock Status	On	
APIC Mode	Enabled	
1st Boot Device	Hard Disk	
2nd Boot Device	CD/DVD	
3rd Boot Device	Removable Dev.	
► Hard Disk Drives	Press Enter	
Boot Other Device	Yes	

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

#### Thermal Management (Enabled)

This item displays CPU's temperature and enables you to set a safe temperature to Prescott CPU.

#### TM Status (TM1/TM2)

This item displays CPU Monitor status.

#### Limit CPUID MaxVal (Disabled)

Use this item to enable or disable the Max CPU ID value limit.

#### Intel XD Bit (Enabled)

This item enables or disables the Intel XD Bit technology.

#### Hyper-Threading Technology (Enabled)

This item is only available when the chipset supports Hyper-Threading and you are using a Hyper-Threading CPU.

#### Quick Power on Self Test (Enabled)

Enable this item to shorten the power on testing (POST) and have your system start up faster. You might like to enable this item after you are confident that your system hardware is operating smoothly.

#### Boot Up Numlock Status (On)

This item defines if the keyboard Num Lock key is active when your system is started.

#### APIC Mode (Enabled)

This item allows you to enable or disable the APCI (Advanced Programmable Interrupt Controller) mode. APIC provides symmetric multi-processing (SMP) for systems, allowing support for up to 60 processors.

### 1st/2nd/3rd Boot Device (Hard Disk/CD/DVD/Removable Dev.)

Use this item to determine the device order the computer used to look for an operating system to load at start-up time. The devices showed here will be different depending on the exact devices installed on your motherboard.

#### ► Hard Disk Drives (Press Enter)

Scroll to this item and press <Enter> to view the following screen:

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Hard Disk Drives

Hard Disk Drives	Help Item
1st Drive <span style="border: 1px solid black; padding: 0 5px;">Hard Disk</span>	Specifies the boot sequence from the available devices.

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

Press <Esc> to return to the Advanced Setup page.

### Boot Other Device (Yes)

When enabled, the system searches all other possible locations for an operating system if it fails to find one in the devices specified under the First, Second and Third boot devices.

Press <Esc> to return to the main menu setting page.

### Advanced Chipset Setup

This page sets up more advanced information about your system. Handle this page with caution. Any changes can affect the operation of your computer.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Advanced Chipset Setup

DRAM Frequency	<span style="border: 1px solid black; padding: 0 5px;">Auto</span>	Help Item
Configure DRAM Timing by SPD	Enabled	<span style="border: 1px solid black; padding: 0 5px;">Options</span>
DVMT Mode Select	DVMT Mode	
DVMT/FIXED Memory	128MB	
HPET	Enabled	Auto
		400 MHz
		533 MHz

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

Using BIOS

**DRAM Frequency (Auto)**

This item enables users to adjust the DRAM frequency. The default setting is auto and we recommend users leave the setting unchanged. Modify it at will may cause the system to be unstable.

**Configure DRAM Timing by SPD (Enabled)**

When this item is set to enable, the DDR timing is configured using SPD. SPD (Serial Presence Detect) is located on the memory modules, BIOS reads information coded in SPD during system boot up.

**DVMT Mode Select (DVMT Mode)**

DVMT is Dynamic Video Memory Technology. This item helps you select video mode.

**DVMT/FIXED Memory (128MB)**

When set to Fixed Mode, the graphics driver will reserve a fixed portion of the system memory as graphics memory. When set to DVMT Mode, the graphics chip will dynamically allocate system memory as graphics memory, according to system and graphics requirements..

**HPET (Enabled)**

This item enables or disables HPET (High Precision Event Timer) support.

Press <Esc> to return to the main menu setting page.

***Integrated Peripherals***

This page sets up some parameters for peripheral devices connected to the system.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Integrated Peripherals

Onboard IDE Controller	Both	Help Item
Onboard AUDIO Function	Enabled	
Onboard LAN Function	Enabled	
Onboard LAN BOOT ROM	Disabled	
Serial Port1 Address	3F8/IRQ4	
USB Functions	Enabled	
Legacy USB Support	Enabled	
		DISABLED: disables the integrated IDE Controller. PRIMARY: enables only the Primary IDE Controller. SECONDARY: enables only the Secondary IDE Controller. BOTH: enables both IDE Controllers.

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

**Onboard IDE Controller (Both)**

Use this item to enable or disable the onboard IDE interface.

**Onboard AUDIO Function (Enabled)**

Use this item to enable or disable the onboard audio controller.

**Onboard LAN Function (Enabled)**

Use this item to enable or disable the onboard LAN function.

Using BIOS

**Onboard LAN BOOT ROM (Disabled)**

Use this item to enable or disable the booting from the onboard LAN or a network add-in card with a remote boot ROM installed.

**Serial Port1 Address (3F8/IRQ4)**

Use this item to enable or disable the onboard COM1 serial port, and to assign a port address.

**USB Functions (Enabled)**

Use this item to enable or disable the USB function.

**Legacy USB Support (Enabled)**

Use this item to enable or disable support for legacy USB devices. Setting to Auto allows the system to detect the presence of USB device at startup. If detected, the USB controller legacy mode is enabled. If no USB device is detected, the legacy USB support is disabled.

Press <Esc> to return to the main menu setting page.

**Power Management Setup**

This page sets up some parameters for system power management operation.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Power Management Setup

		Help Item
ACPI Suspend Type	S3 (STR)	Enable/Disable Key-board Wakeup From S3.  Note: To enable this feature please "USBPWR_R" adjusted to the PIN 2-3.
Soft-off by PWR-BTTN	Instant Off	
PWRON After PWR-Fail	Power Off	
Power On by Ring	Disabled	
Resume By PCI/PCI-E/Lan PME	Disabled	
Resume By USB (S3)	Disabled	
Resume By PS2 KB (S3)	Enabled	
Resume By PS2 MS (S3)	Disabled	
Resume on RTC Alarm	Disabled	

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

**ACPI Suspend Type (S3(STR))**

Use this item to define how your system suspends. In the default, S3, the suspend mode is a suspend to RAM, i.e., the system shuts down with the exception of a refresh current to the system memory.

**Soft-Off By PWR-BTTN (Instant Off)**

Under ACPI (Advanced Configuration and Power management Interface) you can create a software power down. In a software power down, the system can be resumed by Wake Up Alarms. This item lets you install a software power down that is controlled by the power button on your system. If the item is set to Instant-Off, then the power button causes a software power down. If the item is set to Delay 4 Sec, then you have to hold the power button down for four seconds to cause a software power down.

Using BIOS

**PWRON After PWR-Fail (Power Off)**

This item enables your computer to automatically restart or return to its operating status.

**Power On by Ring (Disabled)**

The system can be turned off with a software command. If you enable this item, the system can automatically resume if there is an incoming call on the Modem. You must use an ATX power supply in order to use this feature.

**Resume By PCI/PCI-E/Lan PME (Disabled)**

The system can be turned off with a software command. If you enable this item, the system can automatically resume if there is an incoming call on the PCI Modem or PCI LAN card. You must use an ATX power supply in order to use this feature. Use this item to do wake-up action if inserting the PCI card.

**Resume By USB (S3) (Disabled)**

This item allows you to enable/disable the USB device wakeup function from S3 mode.

**Resume By PS2 KB (S3) (Enabled)**

This item enables or disables you to allow keyboard activity to awaken the system from power saving mode.

**Resume By PS2 MS (S3) (Disabled)**

This item enables or disables you to allow mouse activity to awaken the system from power saving mode.

**Resume on RTC Alarm (Disabled)**

The system can be turned off with a software command. If you enable this item, the system can automatically resume at a fixed time based on the system's RTC (realtime clock). Use the items below this one to set the date and time of the wake-up alarm. You must use an ATX power supply in order to use this feature.

Press <Esc> to return to the main menu setting page.

***PCI / PnP Setup***

This page sets up some parameters for devices installed on the PCI bus and those utilizing the system plug and play capability.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
PCI / PnP Setup

Init Display First <b>OnBoard</b>	<table border="1"> <tr> <th data-bbox="902 1404 1070 1436">Help Item</th> </tr> <tr> <td data-bbox="902 1436 1070 1644">           Select which graphics controller to use as the primary boot device.         </td> </tr> </table>	Help Item	Select which graphics controller to use as the primary boot device.
Help Item			
Select which graphics controller to use as the primary boot device.			

↑↓ → ←: Move    Enter: Select    +/-: Value    F10: Save    ESC: Exit  
F1: General Help    F9: Optimized Defaults

Using BIOS

### Init Display First (PCI Card)

Use this item to select which graphics controller to use as the primary boot devices.

Press <Esc> to return to the main menu setting page.

### PC Health Status

On motherboards support hardware monitoring, this item lets you monitor the parameters for critical voltages, temperatures and fan speeds.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
PC Health Status

--System Hardware Monitor--		Help Item
Shutdown Temperature	Disabled	Disabled
CPU Temperature	54°C/129°F	70°C/158°F
CPU VCore	1.128 V	75°C/167°F
VDIMM	1.904 V	80°C/176°F

↑↓ → ←: Move   Enter: Select   +/-: Value   F10: Save   ESC: Exit  
F1: General Help   F9: Optimized Defaults

### Shutdown Temperature (Disabled)

Enable you to set the maximum temperature the system can reach before powering down.

### System Component Characteristics

These items display the monitoring of the overall inboard hardware health events, such as System & CPU temperature, CPU & DIMM voltage, CPU & system fan speed,...etc.

- CPU Temperature
- CPU VCore
- VDIMM

Press <Esc> to return to the main menu setting page.

### ***Frequency/Voltage Control***

This page enables you to set the clock speed and system bus for your system. The clock speed and system bus are determined by the kind of processor you have installed in your system.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Frequency/Voltage Control

Manufacturer : Intel Ratio Actual Value: 10 CPU Over-clocking Func.: Disabled Auto Detect DIMM/PCI Clk Enabled Spread Spectrum Enabled	Help item Options Disabled Enabled
--	---

↑↓ → ←: Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Optimized Defaults

#### **\* Manufacturer (Intel)**

This item displays the information of current manufacturer of the CPU installed in your computer.

#### **\* Ratio Actual Value (10)**

This item shows the actual ratio of the CPU installed in your system.

#### **CPU Over-clocking Func. (Disabled)**

This item decides the CPU over-clocking function installed in your system. If the over-clocking fails, please turn off the system power. And then, hold the PageUp key(similar to the Clear CMOS function) and turn on the power, the BIOS will recover the safe default.

#### **Auto Detect DIMM/PCI Clk (Enabled)**

When this item is enabled, BIOS will disable the clock signal of free DIMM/PCI slots.

#### **Spread Spectrum (Enabled)**

If you enable spread spectrum, it can significantly reduce the EMI (Electro-Magnetic Interference) generated by the system.

Press <Esc> to return to the main menu setting page.



### ***Load Default Settings***

This option opens a dialog box that lets you install stability-oriented defaults for all appropriate items in the Setup Utility. Select [OK] and then press <Enter> to install the defaults. Select [Cancel] and then press <Enter> to not install the defaults.

### ***Supervisor Password***

This page helps you install or change a password.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Supervisor Password

Supervisor Password : Disabled	Help item
Change Supervisor Password <span>Press Enter</span>	Install or Change the password.

↑↓ → ←: Move   Enter: Select   +/-: Value   F10: Save   ESC: Exit  
F1: General Help   F9: Optimized Defaults


### **Change Supervisor Password (Press Enter)**

You can select this option and press <Enter> to access the sub menu. You can use the sub menu to change the supervisor password.

Press <Esc> to return to the main menu setting page.

**User Password**

This page helps you install or change a password.

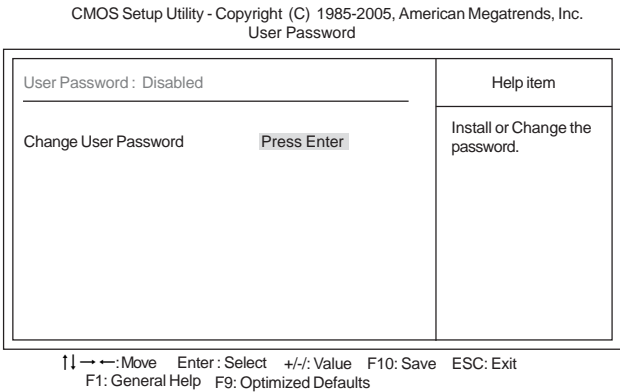

**Change User Password (Press Enter)**

You can select this option and press <Enter> to access the sub menu. You can use the sub menu to change the user password.


Press <Esc> to return to the main menu setting page.

**Save & Exit Setup**

Highlight this item and press <Enter> to save the changes that you have made in the Setup Utility and exit the Setup Utility. When the Save and Exit dialog box appears, select [OK] to save and exit, or select [Cancel] to return to the main menu.

**Exit Without Saving**

Highlight this item and press <Enter> to discard any changes that you have made in the Setup Utility and exit the Setup Utility. When the Exit Without Saving dialog box appears, select [OK] to discard changes and exit, or select [Cancel] to return to the main menu.

 *If you have made settings that you do not want to save, use the “Exit Without Saving” item and select [OK] to discard any changes you have made.*

This concludes Chapter 3. Refer to the next chapter for information on the software supplied with the motherboard.

## Chapter 4

### Using the Motherboard Software

---

#### About the Software CD-ROM

The support software CD-ROM that is included in the motherboard package contains all the drivers and utility programs needed to properly run the bundled products. Below you can find a brief description of each software program, and the location for your motherboard version. More information on some programs is available in a README file, located in the same directory as the software. Before installing any software, always inspect the folder for files named README.TXT, INSTALL.TXT, or something similar. These files may contain important information that is not included in this manual.



1. Never try to install all software from folder that is not specified for use with your motherboard.
2. The notice of Intel HD audio installation (optional): The Intel High Definition audio functionality unexpectedly quits working in Windows Server 2003 Service Pack 1 or Windows XP Professional x64 Edition. Users need to download and install the update packages from the Microsoft Download Center “before” installing HD audio driver bundled in the Driver CD. Please log on to <http://support.microsoft.com/default.aspx?scid=kb;en-us;901105#appliesto> for more information.


#### Auto-installing under Windows 2000/XP/Vista

The Auto-install CD-ROM makes it easy for you to install the drivers and software for your motherboard.



*If the Auto-install CD-ROM does not work on your system, you can still install drivers through the file manager for your OS (for example, Windows Explorer). Refer to the Utility Folder Installation Notes later in this chapter.*

The support software CD-ROM disc loads automatically under Windows 2000/XP/Vista. When you insert the CD-ROM disc in the CD-ROM drive, the autorun feature will automatically bring up the install screen. The screen has three buttons on it, Setup, Browse CD and Exit.

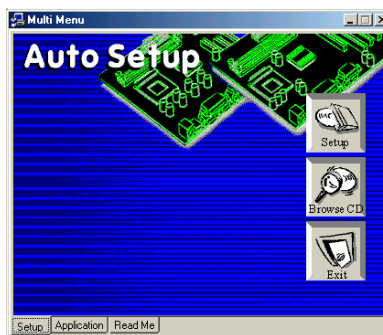

*If the opening screen does not appear; double-click the file “setup.exe” in the root directory.*

#### Using the Motherboard Software

Setup Tab

Setup	Click the <b>Setup</b> button to run the software installation program. Select from the menu which software you want to install.
Browse CD	<p>The <b>Browse CD</b> button is the standard Windows command that allows you to open Windows Explorer and show the contents of the support CD.</p> <p>Before installing the software from Windows Explorer, look for a file named README.TXT, INSTALL.TXT or something similar. This file may contain important information to help you install the software correctly.</p> <p>Some software is installed in separate folders for different operating systems, such as Windows 2000/XP/Vista. Always go to the correct folder for the kind of OS you are using.</p> <p>In install the software, execute a file named SETUP.EXE or INSTALL.EXE by double-clicking the file and then following the instructions on the screen.</p>
Exit	The <b>EXIT</b> button closes the Auto Setup window.

Application Tab

Lists the software utilities that are available on the CD.


Read Me Tab


Displays the path for all software and drivers available on the CD.

Running Setup

Follow these instructions to install device drivers and software for the motherboard:

1. Click **Setup**. The installation program begins:

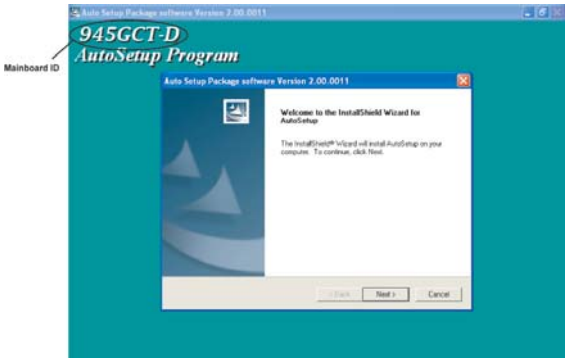


 The following screens are examples only. The screens and driver lists will be different according to the motherboard you are installing.

The motherboard identification is located in the upper left-hand corner.

Using the Motherboard Software

2. Click **Next**. The following screen appears:

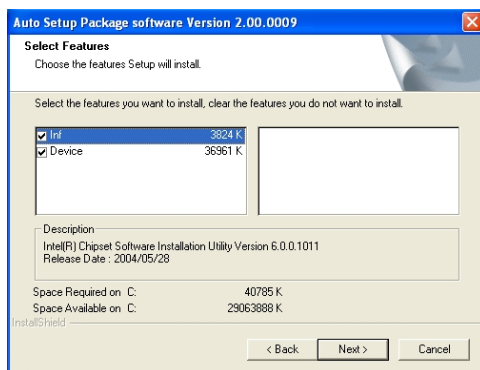

3. Check the box next to the items you want to install. The default options are recommended.
4. Click **Next** run the Installation Wizard. An item installation screen appears:



5. Follow the instructions on the screen to install the items.




1. Drivers and software are automatically installed in sequence. Follow the onscreen instructions, confirm commands and allow the computer to restart a few times to complete the installation.
2. During the Windows Vista Driver Auto Setup Procedure, users should use one of the following two methods to install the driver after the system restart.

## Using the Motherboard Software

### *Method 1. Run Reboot Setup*

Windows Vista will block startup programs by default when installing drivers after the system restart. You must select taskbar icon **Run Blocked Program** and run **Reboot Setup** to install the next driver, until you finish all drivers installation.

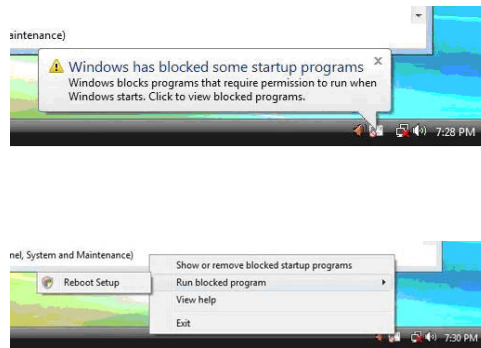


### *Method 2. Disable UAC (User Account Control)*

\* For administrator account only. Standard user account can only use Method 1.

Disable Vista UAC function before installing drivers, then use CD driver to install drivers, it will continue to install drivers after system restart without running blocked programs.


*Follow these instructions to Disable Vista UAC function:*

1. Go to **Control Panel**.

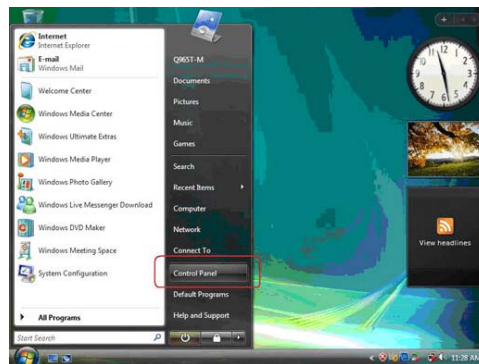


Using the Motherboard Software


2. Select **Classic View**.

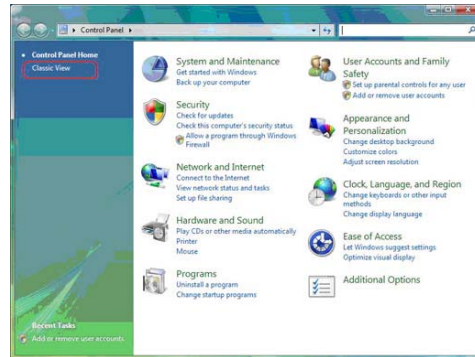

3. Set **User Account**.

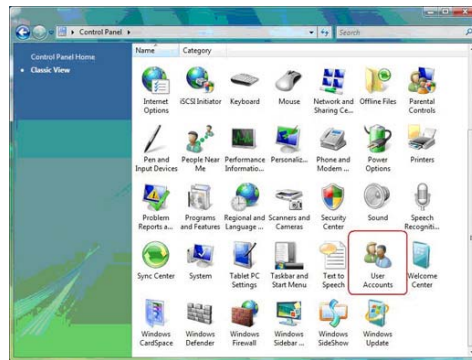


4. Select **Turn User Account Control on or off** and press **Continue**.

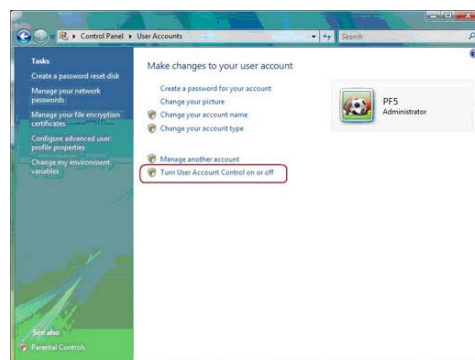

Using the Motherboard Software

5. Disable **User Account Control (UAC)** to help protect your computer item and press **OK**, then press **Restart Now**. Then you can restart your computer and continue to install drivers without running blocked programs.

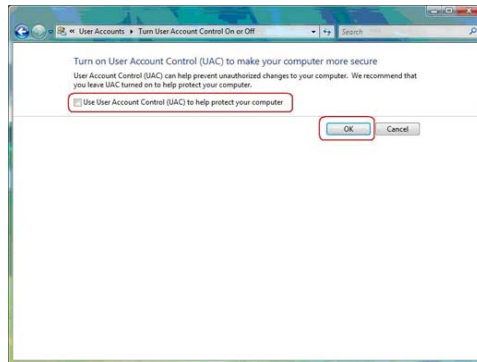

## Manual Installation

Insert the CD in the CD-ROM drive and locate the PATH.DOC file in the root directory. This file contains the information needed to locate the drivers for your motherboard.

Look for the chipset and motherboard model; then browse to the directory and path to begin installing the drivers. Most drivers have a setup program (SETUP.EXE) that automatically detects your operating system before installation. Other drivers have the setup program located in the operating system subfolder.

If the driver you want to install does not have a setup program, browse to the operating system subfolder and locate the readme text file (README.TXT or README.DOC) for information on installing the driver or software for your operating system.

## Utility Software Reference

All the utility software available from this page is Windows compliant. They are provided only for the convenience of the customer. The following software is furnished under license and may only be used or copied in accordance with the terms of the license.



*These software(s) are subject to change at anytime without prior notice. Please refer to the support CD for available software.*

This concludes Chapter 4.

Using the Motherboard Software